

Série OQC




Outils de chargement OQC

OQC-MT4.6-5

Classe de poids de l'excavateur (t) : 30-55


Pression de service (bar) : 350 préhension

Capacité de charge (t) : 8

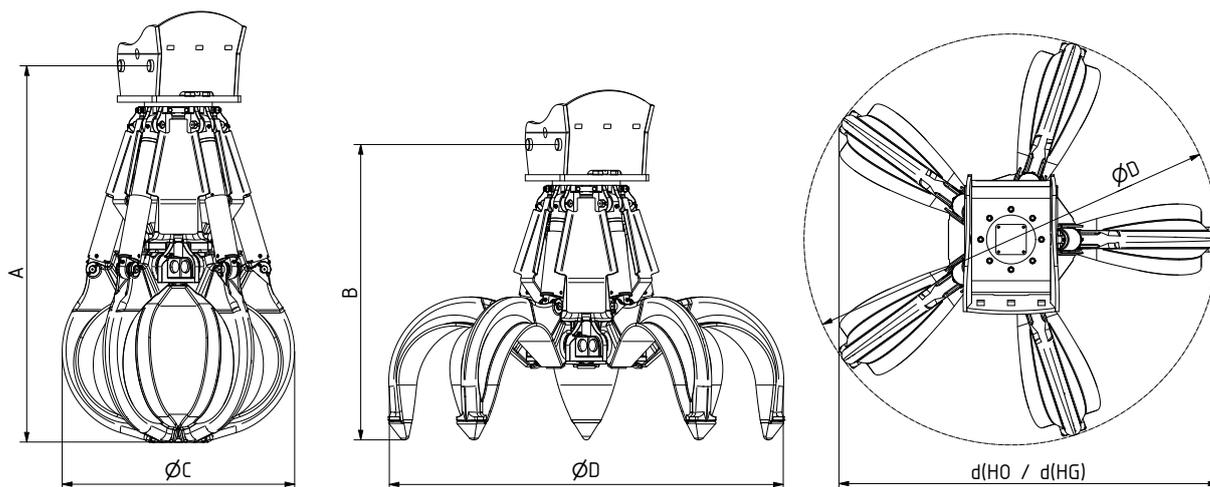

Type	Contenance (l)	Poids (kg)		Dimensions (mm)					
		HO	HG	A	B	C	D	d(HO)	d(HG)
OQC65-MT4.6-400-5	400	1820	1920	2032	1637	1350	2160	1990	2015
OQC65-MT4.6-600-5	600	1910	2035	2117	1667	1360	2320	2120	2180
OQC65-MT4.6-800-5	800	1960	2140	2252	1712	1540	2600	2380	2420
OQC65-MT4.6-1000-5	1000	2040	2290	2362	1747	1680	2800	2565	2635
OQC65-MT4.6-1250-5	1250	2120	2440	2447	1777	1755	3095	2835	2850
OQC65-MT4.6-1400-5	1400	2200	2590	2532	1807	1780	3190	2925	3060



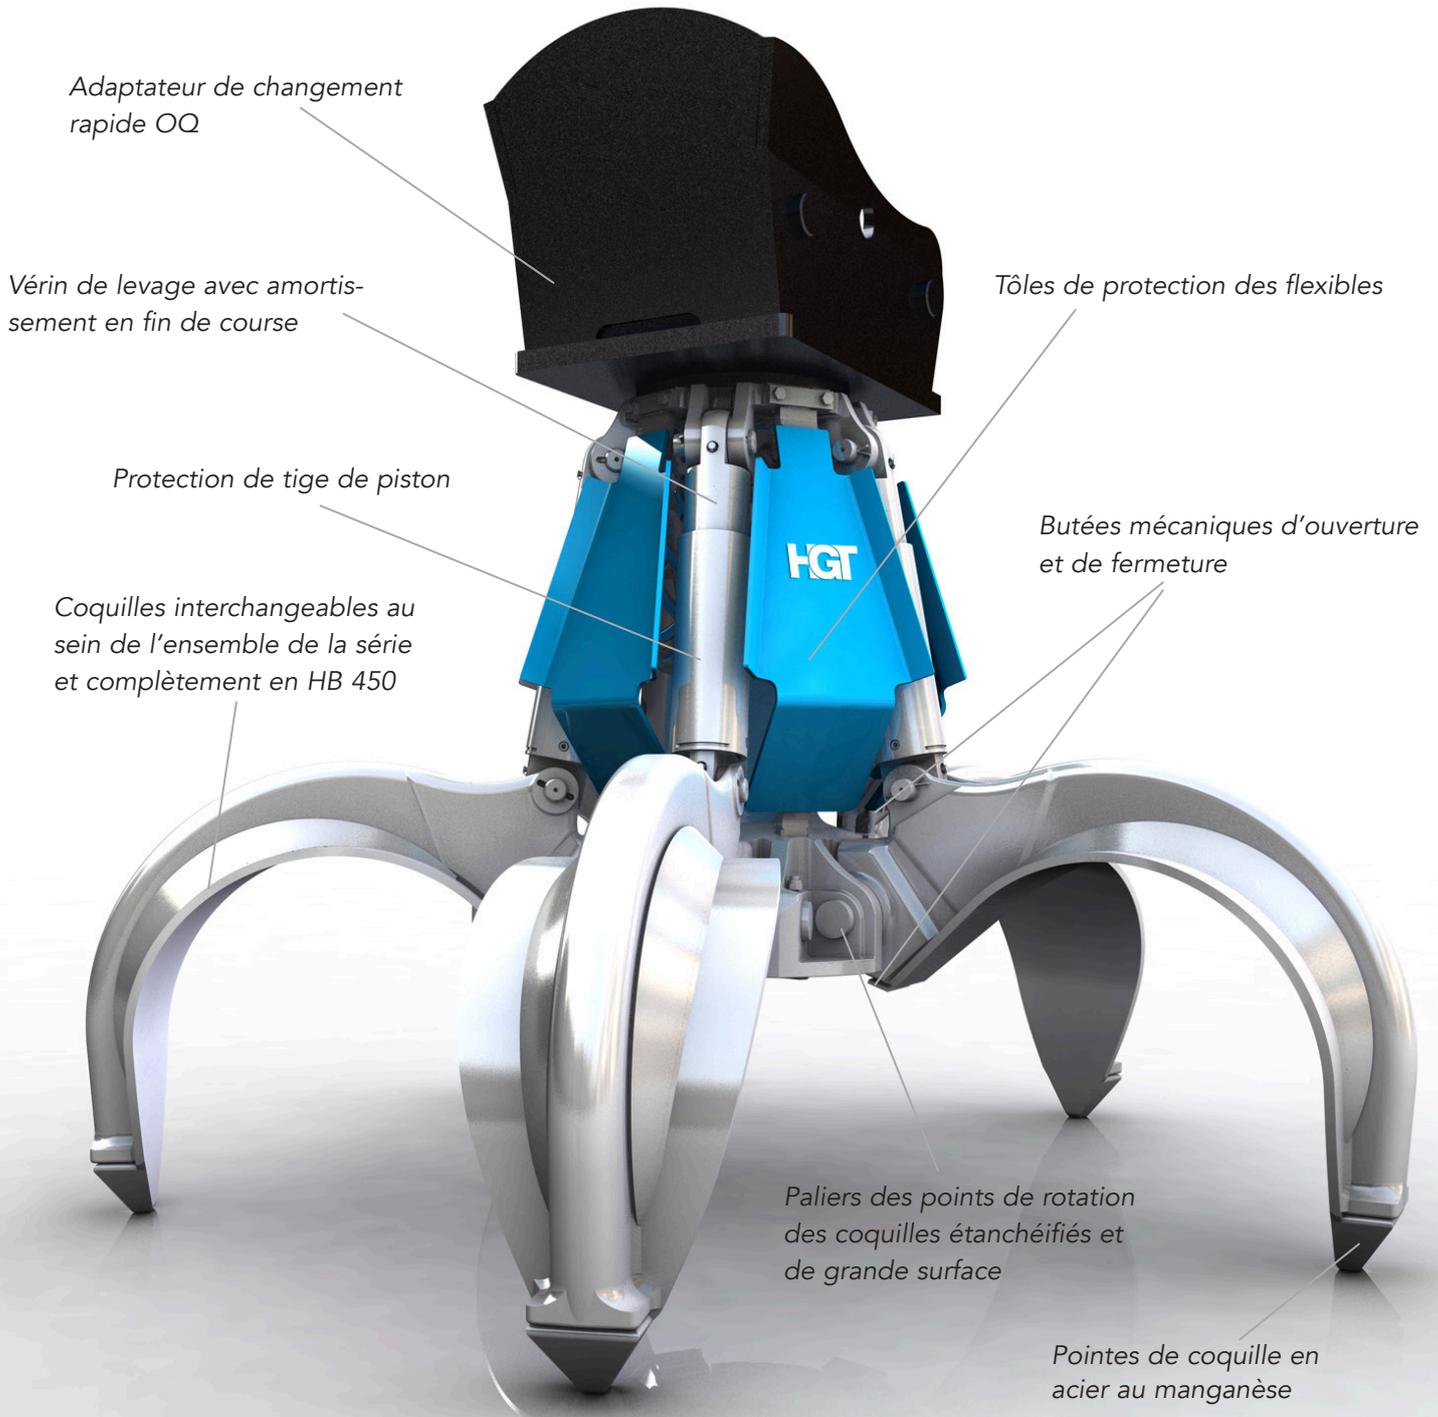

Grappin de manutention et de tri spécial pour les matériaux grossiers et encombrants, tels que dans les carrières, la récupération de ferraille, les entreprises de déchets et de recyclage. Livrable en version à 4 ou 5 bras